


Reverse Circulation Fishing Magnet

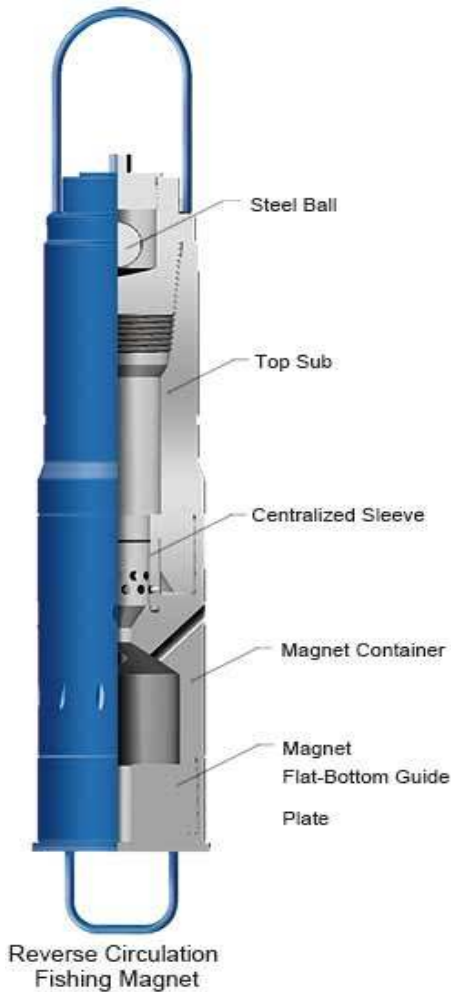

AEI has introduced the Reverse Circulation Fishing Magnet, a new fishing tool that offers the benefits of both the Reverse Circulation Fishing Basket and the Fishing Magnet. This tool's unique reverse-circulation design helps to improve the performance of cleaning the bottom hole.

Construction:

The AEI's Reverse Circulation Fishing Magnet is comprised of a lifting bail, top sub, housing, magnet element, pole plate, standard flush guide, and steel ball. The appropriate guide can be selected for use.

Operation:

The fishing magnet is run approximately 40 inches from the bottom of the hole. Circulating is done to wash the fish, reduce circulation, lower the fishing magnet to the bottom of the hole, and attach the fish. Slow rotation is key to ensuring positive contact. After lifting the magnet up 10 to 20 inches, a steel ball is dropped into the fishing string and pumped into ball seat. Finally, the magnet is lifted out of the hole after circulating and rotating for a moment.

Optional Accessories:

A standard flush guide is included with the AEI's Reverse Circulation Fishing Magnet. Additionally, lipped guides and mill guides are available for use.

Model	O.D. (mm)	ThreadConn.	Attracted Weight (kg/cm)	Temperature In well	Hole Size (mm)
CLF89	89	NC26	9.8	210	95~110
CLF100	100	NC26	9.8	210	110~135
CLF125	125	NC38	9.8	210	135~165
CLF140	140	NC38	8.5	210	150~175
CLF146	146	NC38	8.5	210	160~185
CLF150	150	NC38	8.5	210	160~185
CLF175	175	NC50	7.9	210	185~210
CLF178	178	NC50	7.8	210	185~210
CLF190	190	NC50	7.8	210	200~225
CLF200	200	NC50	7.6	210	210~235
CLF203	203	NC50	7.6	210	215~240
CLF225	225	6 5/8 REG	7.5	210	235~270
CLF254	254	6 5/8 REG	7	210	265~311
CLF265	265	6 5/8 REG	6.9	210	275~330
CLF292	292	6 5/8 REG	6.9	210	300~442
CLF317	317	7 5/8 REG	6.9	210	340~375
CLF356	356	7 5/8 REG	6.9	210	444.5

+971 52 864 9998

www.aeisupplies.com
 info@aeisupplies.com

United Arab Emirates | Pakistan | United States of America